

# BAIER



## METZGER/McGUIRE

Exclusive U.S. Distributor of Baier Mixers and Milling Saws

800.223.MM80

[www.metzgermcguire.com](http://www.metzgermcguire.com)

# BDN 511

## Floor channel cutting system

dry



Diamond floor channel cutter with 11 diamond cutting blades for bridgeless milling up to 2" wide and 1.8" deep

- 2.400 Watt power and best rotation speed for extensive milling in the hardest of materials without effort
- All cutting depths possible in one step with 11 diamond cutting blades

- Safe, with a unique and powerful overload electronic
- Electronic control to prevent overload, therefore no waiting time until the motor can restart
- Low operating cost through an electronic and a mechanical clutch
- Electronics for a smooth start and an LED light for optimal cutting efficiency
- Dust-free milling with excellent dust suction device, 1 1/2" diameter

POWER	TORQUE	BLADE Ø	CUTTING WIDTH	CUTTING DEPTH	WEIGHT
2.400 W	7.800 rpm	6"	up to 2"	up to 1.8"	14.3 lbs
BDN 511					ID #
Diamond floor channel cutter BDN 511 with 11 diamond cutting blades GOLD II with carrying case and acc.					6926
Diamond floor channel cutter BDN 511 with 11 diamond cutting blades GOLD II with carriage + carrying case					7375
Special hook to tighten or loosen the BAIER diamond blades					11239
Carriage for BDN 511					7336
Diamond cutting blade GOLD II, diameter 6" x 1.2" for reinforced concrete, highly compressed lime stone, brick and poroton					75333



Diamond cutting blade



# BSM 2863

## High-Speed Mixer



2-speed transmission for tough mixing material up to 500 lbs (225 kg)

- High-speed mixer with 2 speed transmission
- Rapid Speed Changeover
- Strongest mixer in the market
- Hand guided and stand mixing



Thoroughly mix up to 6-60# bags of Rapid Set® TRU® PC or similar cementitious materials in 2 minutes or less!

- Up to 152 Nm of torque (112 ft-lb/620 in-lb)
- For tough materials such as cementitious epoxy mortars, overlays etc.
- Ergonomically formed grips and easy handling
- Electronic controls the optimum speed depending on material
- Best suited for use in mixing devices
- Clamping collar 43 mm (1.7")
- Die-cast aluminum and powder coated, case hardened gearbox parts for durability


POWER	TORQUE	MIXING SPEED	MIXING QUANTITY	WEIGHT
1.400 Watt	112 ft-lb	220 – 470 rpm	Up to 500 lbs (225 kg)	12.13 lbs (5,5 kg)





INDUSTRY STANDARD INDUSTRIAL FLOOR JOINT FILLERS AND REPAIR PRODUCTS

# TECHNICAL SUPPORT TEAM

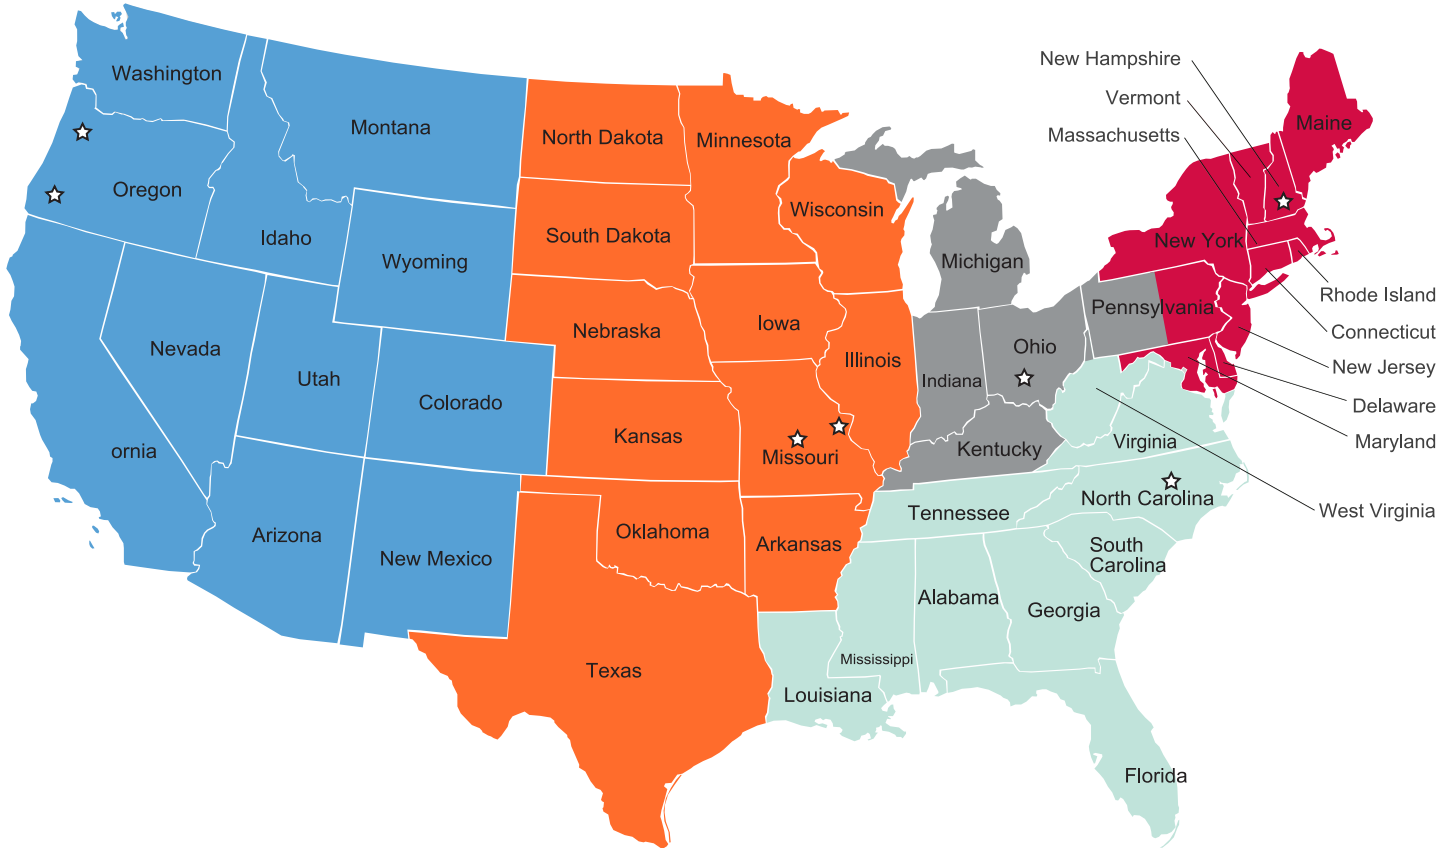

**Jeromy Craig**  
Portland, OR  
Tel: 503-703-9686  
E-Mail: jbcraig8@comcast.net

**Dick Risch**  
St. Peters, MO  
Tel: 314.651.8301  
E-Mail: concrprisch@aol.com

**Dave Sharamitaro**  
Hilliard, OH  
Tel: 614-440-0599  
E-Mail: dave@metzgermcguire.com

**Jim Marchillo**  
Concord, NH  
Tel: 603.496.5512  
E-Mail: jim@metzgermcguire.com

**Matt Rizzo**  
Medford, OR  
Tel: 541.301.3943  
E-Mail: matt@metzgermcguire.com

**Lance Drabczyk**  
Rolla, MO 65401  
Tel: 573.308.0643  
E-Mail: lance@metzgermcguire.com

**Mike Tuccelli**  
Clayton, NC  
Tel: 919-909-8280  
E-Mail: mike@metzgermcguire.com

**Nationwide:**  
**Pat Smith**  
Concord, NH  
Tel: 603.568.1595  
E-Mail: pat@metzgermcguire.com

**Scott Metzger**  
Concord, NH  
Tel: 603.731.8393  
E-Mail: scottmetzger@metzgermcguire.com

**800-223-6680**  
**www.metzgermcguire.com**

**P.O. Box 2217**  
**Concord, NH 03302**

**Fax: 603.224.6020**  
**Email: info@metzgermcguire**