



GUIDE



★ STELLITE ★

JOINT FILLER/JOINT SEALANT REMOVAL BLADE

Removal of existing joint fillers and sealants can be a messy and time-consuming process. Diamond blades build up too much heat and can melt the filler/sealant. Carbide tip blades can work, but they don't stay sharp long and require frequent replacement. Stellite® tipped cutting blades solve both heating and wear issues and a single blade can rip through thousands of feet of filler/sealant with ease.

Stellite® is a cobalt-chromium "super alloy" with a matrix designed to provide high wear resistance with an extremely high melting point - making them an ideal choice for extreme cutting applications. Each specially shaped Stellite® removal blade contains six thermally stable Stellite® cutter tips. These tips effortlessly slice through hard or soft fillers/sealants without melting the product. Once you try a Stellite® blade for filler/sealer removal, we're confident you'll never go back to another blade again!

Advantages:

- Effectively removes soft and semi-rigid materials without melting the material, including polyureas!
- High Pressure, High Temperature (HPHT) Solid Stellite® Cutting bits.
- Cutting bits maintain their sharpness to slice through soft or hard semi rigid fillers and sealants.
- HPHT Cutters help blade from dragging, thus minimizing friction heat.
- Stellite® Cutters hardened nature helps ensure long blade life.
- Ideal for use with walk-behind joint-cutting/clean-out saws. Saws with lower rpm's will help further reduce heating blade and filler.



U.S. SAWS
Surface Preparation

PERFECT
TRAC

Available Sizes:

Diam.	Width	Arbor Size	Compatible Saws
7"	.125	Universal or 5/8"-7/8"	Perfect Trac, US Saws Dust Buggy
7"	.187	Universal or 5/8"-7/8"	Perfect Trac, US Saws Dust Buggy
8"	.125	5/8"-7/8"	US Saws Dust Buggy
8"	.187	5/8"-7/8"	US Saws Dust Buggy

Distributed by

 **METZGER/McGUIRE**

800-223-6680
P.O. Box 2217 Concord, NH 03302
E-mail: info@metzgermcguire.com


BLADES & BRUSHES

DIAMOND U BLADE




.25" x 5" Blade
.375" x 5" Blade

10" JOINT CLEANING/ PREP DIAMOND BLADE




7" Blade
8" Blade
10" Blade

STELLITE JOINT FILLER REMOVAL BLADE



7" x .125 Blade
7" x .187 Blade
8" x .125 Blade
8" x .187 Blade

JUSTCUT TURBO U BLADE

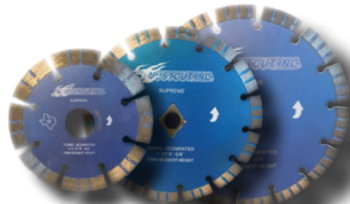

4.5" Blade
7" Blade
8" Blade

TIGER TOOTH BLADE



4.5" x .090 Blade
7" x .090 Blade
8" x .095 Blade

4.5" ZEC HEAVY ABRASIVE PAD



16 grit
24 grit
36 grit

NYALOX CUP BRUSH



2.5 Cup

NYALOX WHEEL



3" Cup
4" Cup

NYALOX END BRUSH



.75" Brush

MEDIUM GRIT FINISHING PAD



Blue (coarse)
Orange (extra coarse)

TELESCOPING FLOOR RAZOR SCRAPER



8" Scraper
Scraper Blades
(pack of 10)

Distributed By

 **METZGER/McGUIRE**

info@metzgermcguire.com

CARTRIDGE GUNS



ALBION 250ML SINGLE CARTRIDGE GUN
FOR USE WITH RAPID REFLOOR 250 ML CARTRIDGES



ALBION T1500 DUAL CARTRIDGE GUN
FOR USE WITH SPAL-PRO RSF OR
RAPID REFLOOR PIT GROUT 1500 ML CARTRIDGES



NEWBORN #632 BULK CAULKING GUN
FOR HAND APPLYING MM-80



ALBION T900 DUAL CARTRIDGE GUN
FOR USE WITH SPAL-PRO 2000 900 ML CARTRIDGES



**NEWBORN MODEL 435XSP
CARTRIDGE GUN**
FOR USE WITH SPAL-PRO 2000 450 ML CARTRIDGES



ALBION T600 DUAL CARTRIDGE GUN
FOR USE WITH SPAL-PRO RS88,
EDGE-PRO 80, RAPID REFLOOR, & RS65
600 ML CARTRIDGES

Distributed By



info@metzgermcguire.com

1-800-223-6680

STATIC MIXERS & LOCK NUTS



**STATIC MIXER FOR
RAPID REFLOOR 250 ML**



**STATIC MIXER FOR
SPAL-PRO 2000 450 ML**




**STATIC MIXER FOR
EDGE-PRO 80 600 ML**




**STATIC MIXER FOR
RAPID REFLOOR 600 ML**



**STATIC MIXER FOR
SPAL-PRO 2000 900 ML**

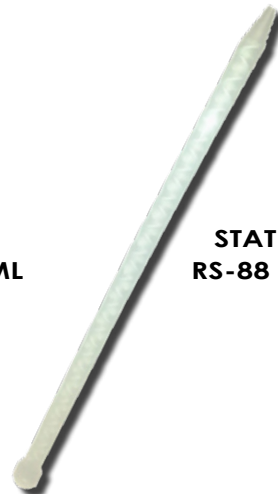

**STATIC MIXER FOR
RS-88 & RS-65 600 ML**

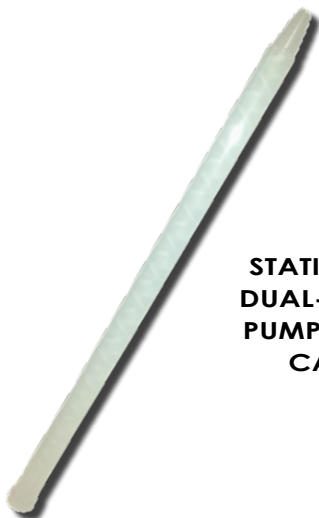

**STATIC MIXER FOR
DUAL-COMPONENT
PUMPS OR 1500 ML
CARTRIDGES**



LOCK NUT CLEAR



LOCK NUT ALUMINUM



LOCK NUT SQUARE



LOCK NUT BLACK



ALUMINUM NIGHT CAP

Cartridge/Mixer Matches



RAPID REFLOOR 250 ML

Static mixer:

1/4" x 32 element static mixer
Flow Restrictor Cap



RAPID REFLOOR 600 ML

Static mixer:

10.7 mm x 24 element square static mixer
Flow Restrictor Cap



EDGE-PRO 80 600 ML & EDGE-PRO 90 600 ML

Static mixer:

3/8" x 24 element static mixer



SPAL-PRO RS-65 600 ML & SPAL-PRO RS-88 600 ML

Static mixer:

3/8" x 32 element static mixer

for Metzger/McGuire Products



SPAL-PRO 2000 450 ML
Static mixer:
8.7 mm x 24 element static mixer



SPAL-PRO 2000 900 ML
Static mixer:
1/2" x 24 element static mixer



PIT GROUT 1500 ML, SPAL-PRO STABILIZER EXP 1500 ML & SPAL-PRO RSF 1500 ML
Static mixer:
1/2" x 30 or 32 element static mixer

U.S.SAWS

Surface Preparation

These machines are designed to clean-out existing control joints, remove old joint fill material that needs to be replaced and rout out random cracks in concrete surfaces. Durability, ease of use, high accuracy and production rates are the key components to our industry leading line of saws.



**JS131 GAS WALK
BEHIND JOINT
CLEAN-OUT SAW**



**JS160 PROPANE JOINT
CLEAN-OUT SAW**



**MARK III DUST
BUGGY**



**5" HAND HELD
CRACK CHASER**



**CC100 WALK
BEHIND CRACK
CHASER**

Polymer Pumps are easy to use machines for filling control joints with semi-rigid epoxy and polyurea joint fill materials. The simple design makes maintenance easier and less time-consuming. The semi-transparent poly tanks allow the operator to monitor the level of material used.



**US SAWS ONE MAN
POLYMER PUMP**



**US SAWS TWO MAN
POLYMER PUMP**



Distributed By

 **METZGER/McGUIRE**

mminfo@metzgermcguire.com

BDN 511

Floor channel cutting system

dry



Diamond floor channel cutter with 11 diamond cutting blades for bridgeless milling
up to 2" wide and 1.8" deep

- 2.400 Watt power and best rotation speed for extensive milling in the hardest of materials without effort
- All cutting depths possible in one step with 11 diamond cutting blades

- Safe, with a unique and powerful overload electronic
 - Electronic control to prevent overload, therefore no waiting time until the motor can restart
 - Low operating cost through an electronic and a mechanical clutch
- Electronics for a smooth start and an LED light for optimal cutting efficiency
- Dust-free milling with excellent dust suction device, 1 1/2" diameter

POWER	TORQUE	BLADE Ø	CUTTING WIDTH	CUTTING DEPTH	WEIGHT
2.400 W	7.800 rpm	6"	up to 2"	up to 1.8"	14.3 lbs
BDN 511					ID #
Diamond floor channel cutter BDN 511 with 11 diamond cutting blades GOLD II with carrying case and acc.					6926
Diamond floor channel cutter BDN 511 with 11 diamond cutting blades GOLD II with carriage + carrying case					7375
Special hook to tighten or loosen the BAIER diamond blades					11239
Carriage for BDN 511					7336
Diamond cutting blade GOLD II, diameter 6" x 1.2" for reinforced concrete, highly compressed lime stone, brick and poroton					75333



Diamond cutting blade





New & Improved!

PERFECT TRAC

CONCRETE JOINT CUTTING AND CLEANING SAW

PT Chassis

Blade not included

Features:

- ★ Cutting depth up to 2^{1/8} inches
- ★ Improved dust collection manifold
 - Solid aluminum construction
 - Four-way adjustable handle
 - Self-adjusting safety guard
 - Low center of gravity (weighs 60 lbs)

Ideal For:

- Cutting new joints in concrete
- Concrete joint cleaning
- Epoxy and polyurea filler removal



The *Perfect Trac* is a revolutionary saw for cutting and cleaning joints in concrete. Its low center of gravity and weight driven design allows for less vibration, cleaner, straighter cuts and reduced joint edge chipping during typical sawing operations.

Perfect Trac's solid aluminum design provides unequalled durability in a lightweight form, allowing for easier transport and maneuvering than most other saws.

Call today and find out why *Perfect Trac* is changing the way contractors cut and clean joints!

Distributed by


 **METZGER/McGUIRE**

800-223-6680

P.O. Box 2217

Concord, NH 03302

E-mail: info@metzgermcguire.com

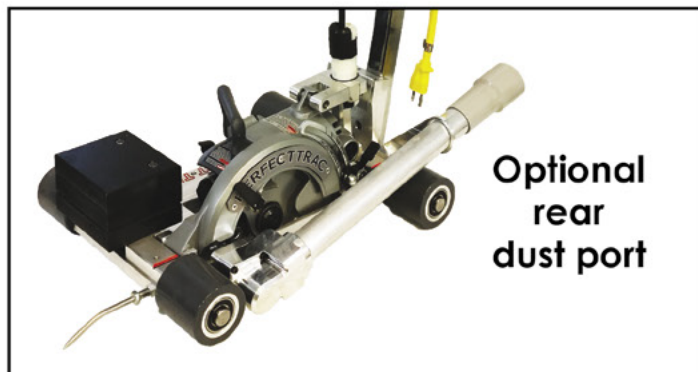

**Optional
rear
dust port**

GorillaConcreteTools



GCT-10 ELECTRIC JOINT SAW

SPECIFICATIONS

Power Requirements 120 volts, 20 amps
Cutting Depth.....Adjustable 0" - 2.5"
Blade Size.....9" maximum (7/8" arbor)
GrinderMetabo W24-230
Wheel Size:.....4"(D) x 2"(W)
Arbor Size.....5/8"
Vacuum Requirement 250 c.f.m. minimum (2" dust port)



CC-6 ELECTRIC CRACK CHASER

SPECIFICATIONS

Power Requirements: 120 Volts, 20 Amps
Cutting Depth:.....Adjustable 0" - 1"
Blade Size:.....6" (7/8" arbor)
Handle Positions:.....4
Vacuum Requirements:.....300 cfm (3" dust port)
Wheel size:4"(D) x 2"(W)

GCT-X SERIES JOINT SAW

Weight: 150 lbs
Blade Size:..... 8" or 10"
Arbor size: 7/8"
Cutting Depth: up to 3"
Vacuum Requirement: 250 cfm (8"),
250 cfm (10")



ELECTRIC JOINT SAW

Power Head:
Baldor 240 Volt, 5.5 HP,
26 lb-ft (Peak torque),
Honda GX-390
(Gas), 11.7 HP, 19.5
lb-ft (Peak torque)



COMBUSTION JOINT SAW

Power Head:
Honda GX-390, 11.7
HP, 19.5 lb-ft (Peak
torque), Baldor 240
Volt, 5.5 HP, 26 lb-ft
(Peak torque)

GP-1 DUAL



Weight: 230 lbs. Dry

COMPONENT PUMP

Motor: 1 HP DC motor
Tank Size: 2 Stainless 6.4 Gallon Tanks
Hoses: PTFE lined SS Braided Lines
Applicator: Aluminum Dual Port Manifold
Controller: Variable Speed, Smooth Start/Stop
Viscosity: 200-7000 cPs
Flow Rate: Up to 1 GPM
Ratio: 1:1 (2:1 option available)
Power Source: 115 V AC (Standard,
24V DC (optional))

GP-2 DUAL



Weight: 190 lbs. Dry Generator,
Mounting Bracket 20 lbs.


Distributed By METZGER/McGUIRE

800-223-6680 info@metzgermcguire.com



INDUSTRY STANDARD INDUSTRIAL FLOOR JOINT FILLERS AND REPAIR PRODUCTS

TECHNICAL SUPPORT TEAM

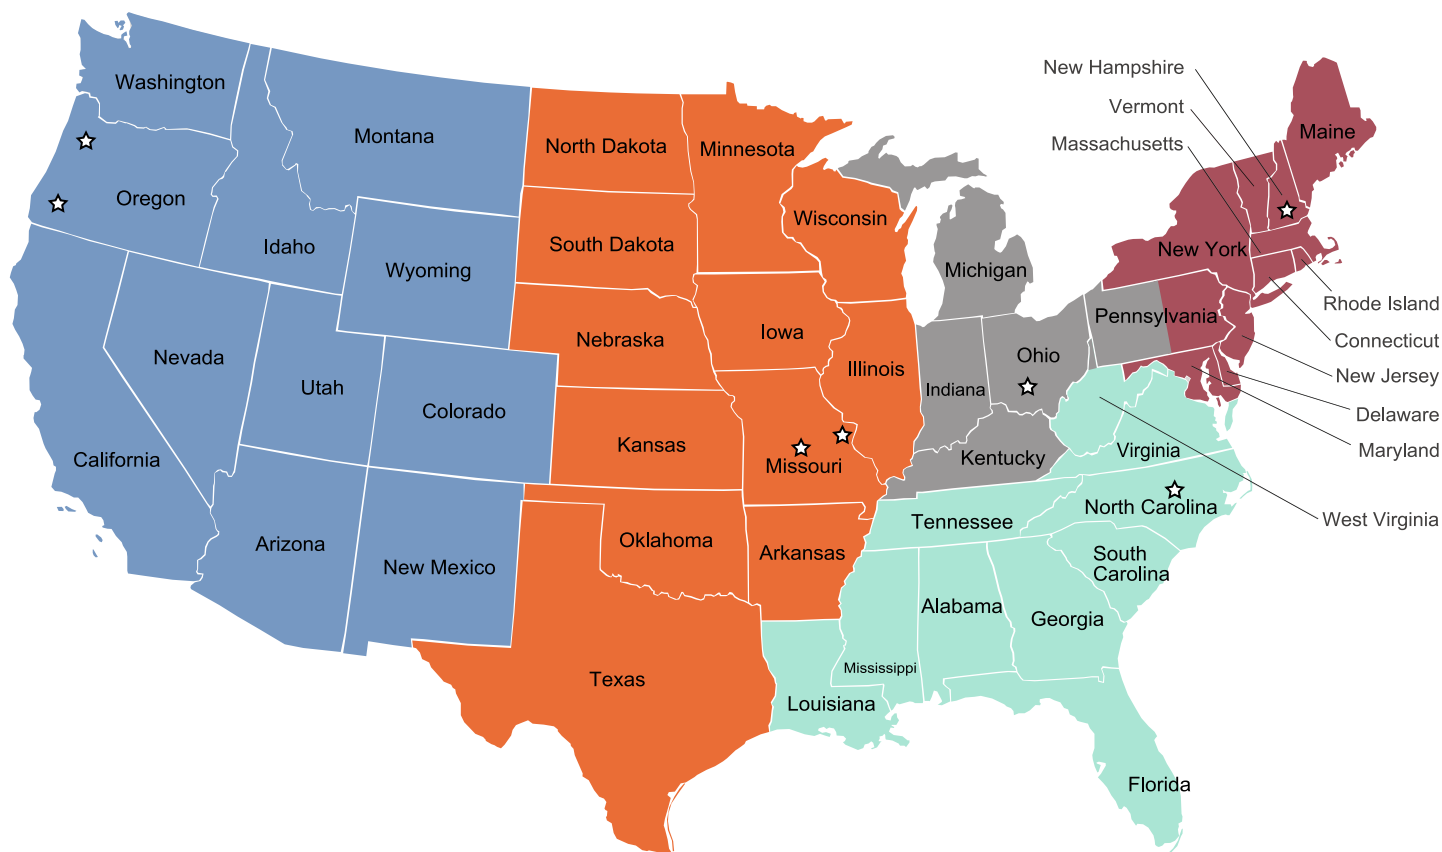

Jeromy Craig
Portland, OR
Tel: 503-703-9686
E-Mail: jbcraig8@comcast.net

Dick Risch
St. Peters, MO
Tel: 314.651.8301
E-Mail: concrprisch@aol.com

Dave Sharamitaro
Hilliard, OH
Tel: 614-440-0599
E-Mail: dave@metzgermcguire.com

Jim Marchillo
Concord, NH
Tel: 603.496.5512
E-Mail: jim@metzgermcguire.com

Matt Rizzo
Medford, OR
Tel: 541.301.3943
E-Mail: matt@metzgermcguire.com

Lance Drabczyk
Rolla, MO 65401
Tel: 573.308.0643
E-Mail: lance@metzgermcguire.com

Mike Tuccelli
Clayton, NC
Tel: 919-909-8280
E-Mail: mike@metzgermcguire.com

Nationwide:
Pat Smith
Concord, NH
Tel: 603.568.1595
E-Mail: pat@metzgermcguire.com

Scott Metzger
Concord, NH
Tel: 603.731.8393
E-Mail: scottmetzger@metzgermcguire.com

800-223-6680
www.metzgermcguire.com

P.O. Box 2217
Concord, NH 03302

Fax: 603.224.6020
Email: info@metzgermcguire