



JOINT FILLER/JOINT SEALANT REMOVAL BLADE

Removal of existing joint fillers and sealants can be a messy and time-consuming process. Diamond blades build up too much heat and can melt the filler/sealant. Carbide tip blades can work, but they don't stay sharp long and require frequent replacement. Stellite® tipped cutting blades solve both heating and wear issues and a single blade can rip through thousands of feet of filler/sealant with ease.

Stellite® is a cobalt-chromium "super alloy" with a matrix designed to provide high wear resistance with an extremely high melting point - making them an ideal choice for extreme cutting applications. Each specially shaped Stellite® removal blade contains six thermally stable Stellite® cutter tips. These tips effortlessly slice though hard or soft fillers/sealants without melting the product. Once you try a Stellite® blade for filler/sealer removal, we're confident you'll never go back to another blade again!

Advantages:

- Effectively removes soft and semi-rigid materials without melting the material, including polyureas!
- High Pressure, High Temperature (HPHT) Solid Stellite® Cutting bits.
- Cutting bits maintain their sharpness to slice through soft or hard semi rigid fillers and sealants.
- HPHT Cutters help blade from dragging, thus minimizing friction heat.
- Stellite® Cutters hardened nature helps ensure long blade life.
- Ideal for use with walk-behind joint-cutting/clean-out saws. Saws with lower rpm's will help further reduce heating blade and filler.



Available Sizes:

Diam.	Width	Arbor Size	Compatible Saws	MSRP	
7"	.125	Universal or 5/8"-7/8"	Perfect Trac, Gorilla Saws, US Saws Dust Buggy	\$185.00	\$166.50
7"	.187	Universal or 5/8"-7/8"	Perfect Trac, Gorilla Saws, US Saws Dust Buggy	\$185.00	\$166.50
8"	.125	5/8"-7/8"	Gorilla Saws, US Saws Dust Buggy	\$220.00	\$198.00
8"	.187	5/8"-7/8"	Gorilla Saws, US Saws Dust Buggy	\$220.00	\$198.00

Distributed by



800-223-6680
P.O. Box 2217 Concord, NH 03302
E-mail: info@metzgermcguire.com


BLADES & BRUSHES

DIAMOND U BLADE



.25" x 5" Blade \$135.00 ea .375" x 5" Blade \$165.00 ea

10" JOINT CLEANING/ PREP DIAMOND BLADE



7" Blade \$52.00 ea 8" Blade \$55.00 ea 10" Blade \$115.00 ea

STELLITE JOINT FILLER REMOVAL BLADE



7" x .125 Blade \$185.00 ea 7" x .187 Blade \$185.00 ea 8" x .125 Blade \$220.00 ea 8" x .187 Blade \$220.00 ea

JUSTCUT TURBO U BLADE



4.5" Blade \$35.00 ea7" Blade \$62.00 ea8" Blade \$65.00 ea

TIGER TOOTH BLADE



4.5" x .090 Blade \$35.00 ea 7" x .090 Blade \$62.00 ea 8" x .095 Blade \$65.00 ea

4.5" ZEC HEAVY ABRASIVE PAD



16 grit \$10.00 ea 24 grit \$10.00 ea 36 grit \$10.00 ea

NYALOX CUP BRUSH



2.5 Cup \$10.00 ea

NYALOX WHEEL



3" Cup \$10.00 ea 4" Cup \$10.00 ea

NYALOX END BRUSH



.75" Brush \$8.00 ea

MEDIUM GRIT FINISHING PAD



Blue (course) \$11.50 ea Orange (extra course) \$29.50 ea

TELESCOPING FLOOR RAZOR SCRAPER



Distributed By

METZGER/MCGUIRE

800-223-6680

info@metzgermcguire.com

CARTRIDGE GUNS



ALBION 250ML SINGLE CARTRIDGE GUN

FOR USE WITH RAPID REFLOOR 250 ML CARTRIDGES

250 ML Gun \$25.00



ALBION T1500 DUAL CARTRIDGE GUN

FOR USE WITH SPAL-PRO RSF OR RAPID REFLOOR PIT GROUT 1500 ML CARTRIDGES

1500 ML Gun \$110.00



NEWBORN #632 BULK CAULKING GUN

FOR HAND APPLYING MM-80

Gun \$85.00



ALBION T900 DUAL CARTRIDGE GUN

FOR USE WITH SPAL-PRO 2000 900 ML CARTRIDGES

900 ML Gun \$82.50



NEWBORN MODEL 435XSP CARTRIDGE GUN

FOR USE WITH SPAL-PRO 2000 450 ML CARTRIDGES

450 ML Gun \$71.50



ALBION T600 DUAL CARTRIDGE GUN

FOR USE WITH SPAL-PRO RS88, EDGE-PRO 80, RAPID REFLOOR, & RS65 600 ML CARTRIDGES

600 ML Gun \$71.50

Distributed By



800-223-6680

info@metzgermcguire.com

STATIC MIXERS & LOCK NUTS





Cartridge/Mixer Matches



RAPID REFLOOR 250 ML Static mixer:

1/4" x 32 element static mixer Flow Restrictor Cap



EDGE-PRO 80 600 ML & EDGE-PRO 90 600 ML Static mixer:

3/8" x 24 element static mixer



RAPID REFLOOR 600 ML

Static mixer:

10.7 mm x 24 element square static mixer Flow Restrictor Cap



SPAL-PRO RS-65 600 ML & SPAL-PRO RS-88 600 ML Static mixer:

3/8" x 32 element static mixer

for Metzger/McGuire Products



SPAL-PRO 2000 450 ML Static mixer:

8.7 mm x 24 element static mixer



SPAL-PRO 2000 900 ML Static mixer:

1/2" x 24 element static mixer



PIT GROUT 1500 ML, SPAL-PRO STABLIZER EXP 1500 ML & SPAL-PRO RSF 1500 ML Static mixer:

1/2" x 30 or 32 element static mixer

U.S. SAVSSurface Preparation



ONE MAN POLYMER PUMP

High volume electric pump for dual component installation.

- The New Design of this joint fill pump allows for one person operation
- The unit comes standard with a 1:1 component ratio, but a 2:1 component ratio is available
- Lower tanks makes filling easier
- Dedicated storage area for generator or battery
- Waste bucket holder for less drips on the floor
- Enclosed box for tools storage



Distributed by METZGER/MCGUIRE



METER-MIX DISPENSE EQUIPMENT

METERING & DISPENSING EQUIPMENT FOR THE PROFESSIONAL CONTRACTOR

PCH GMP-050 "PRO"



APPLICATIONS

- Joint Filling
- Concrete Restoration
- Small Joint Sealing
- Small Spall Repair
- Anchoring
- Spray

FEATURES AND BENEFITS

- Portable, Reliable, Rugged Design
- Easy to Operate & Maintain
- Stainless Steel Construction
- Changeable Ratios
- 9 Gallon Stainless Steel Tanks
- ½ HP DC Drive Motor
- Automatic or Manual Dispense Valve
- Electric/pneumatic Powered
- Backed by AST Warranty
- Pumps Non-Abrasive Materials
- Fixed Ratios of 1:1 to 4:1
- Continuous Flow Up to 0.5 GPM
- Fluid Pressures Up to 750 PSI
- Viscosities Up to 5,000 CPS
- Variable Flow Rate
- Uses AST GMP Metering Pumps



BDN 511



Floor channel cutting system



Diamond floor channel cutter with 11 diamond cutting blades for bridgeless milling

up to 2" wide and 1.8" deep

- 2.400 Watt power and best rotation speed for extensive milling in the hardest of materials without effort
- All cutting depths possible in one step with 11 diamond cutting blades
- Safe, with a unique and powerful overload electronic
- Electronic control to prevent overload, therefore no waiting time until the motor can restart
- Low operating cost through an electronic and a mechanical clutch
 Electronics for a smooth start and an LED light for optimal cutting
- efficiency
 - Dust-free milling with excellent dust suction device,
- 1 1/2" diameter


POWER	TORQUE	BLADE Ø	CUTTING WIDTH	CUTTING DEPTH	WEIGHT	
2.400 W	7.800 rpm	6"	up to 2"	up to 1.8"	14.3 lbs	
BDN 511					ID#	
Diamond floor	6926					
Diamond floor	7375					
Special hook to	11239					
Carriage for B	7336					
Diamond cutting blade GOLD II, diameter 6" x 1.2" for reinforced concrete, highly compressed						
lime stone, bri	ck and poroton					







800-223-6680 www.metzgermcguire.com

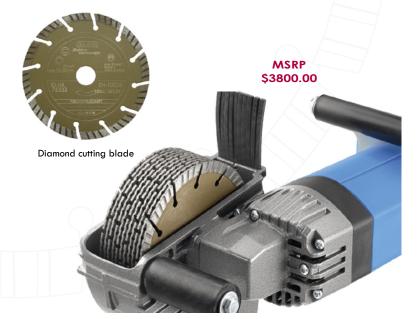





CONCRETE JOINT CUTTING AND CLEANING SAW

PT Chassis

Features:

Cutting depth up to 21/8 inches

Improved dust collection manifold

- Solid aluminum construction
- Four-way adjustable handle
- Self-adjusting safety guard

Low center of gravity (weighs 60 lbs)

Ideal For:

Cutting new joints in concrete

· Concrete joint cleaning

 Epoxy and polyurea filler removal

MSRP

\$2100.00

Distributed by



800-223-6680 P.O. Box 2217 Concord, NH 03302 E-mail: info@metzgermcguire.com

The Perfect Trac is a revolutionary saw for cutting and cleaning joints in concrete. Its low center of gravity and weight driven design allows for less vibration, cleaner, straighter cuts and reduced joint edge chipping during typical sawing operations.

Perfect Trac's solid aluminum design provides unequaled durability in a lightweight form, allowing for easier transport and maneuvering than most other saws.

Call today and find out why Perfect Trac is changing the way contractors cut and clean joints!





GCT-10 ELECTRIC JOINT SAW

SPECIFICATIONS

Power Requirements....... 120 volts, 20 amps Cutting Depth...... Adjustable 0" - 2.5"

Blade Size 9" maximum (7/8" arbor)

Grinder Metabo W24-230 Wheel Size: 4"(D) x 2"(W)

Arbor Size...... 5/8"

Vacuum Requirement....... 250 c.f.m. minimum (2" dust port)





GCT-8 SERIES II CONCRETE SAW

SPECIFICATIONS

Engine Honda GX200 (5.5hp)
Cutting Depth Adjustable 0" - 2"

Handle Positions: 7

Vacuum Requirement....... 250 c.f.m. minimum (2" dust port)

XESERIES JOINT SAW

SPECIFICATIONS

Powerhead: Honda GX390

Baldor 5 HP electric

Blade size:...... 10" to 14" blade

Cutting Depth:......2"- 4"

Drive: 2 Cogged v-belt

Vacuum requirements: 350 cfm (3" dust port)







CC-6 ELECTRIC CRACK CHASER

SPECIFICATIONS

Power Requirements:....... 120 Volts, 20 Amps Cutting Depth:...... Adjustable 0" - 1" Blade Size:.................. 6" (7/8" arbor)

Handle Positions: 4


Vacuum Requirements: 300 cfm (3" dust port)

Wheel size: 4"(D) x 2"(W)

Distributed By MITTGERMGUIR 800-223-6680 info@metzgermcguire.com



TECHNICAL SUPPORT TEAM

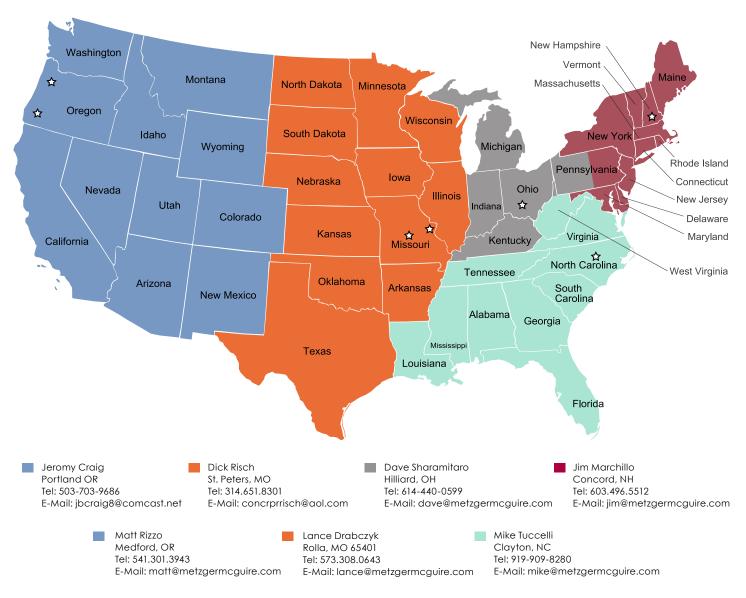

Nationwide:

Pat Smith Concord, NH Tel: 603.568.1595 E-Mail: pat@metzgermcguire.com Scott Metzger Concord, NH Tel: 603.731.8393

E-Mail: scottmetzger@metzgermcguire.com

800-223-6680 www.metzgermcguire.com

P.O. Box 2217 Concord, NH 03302 Fax: 603.224.6020
Email: info@metzgermcguire