


JOINT SPALLING, MAJOR

Greater than 1"

Difficulty Of Repair

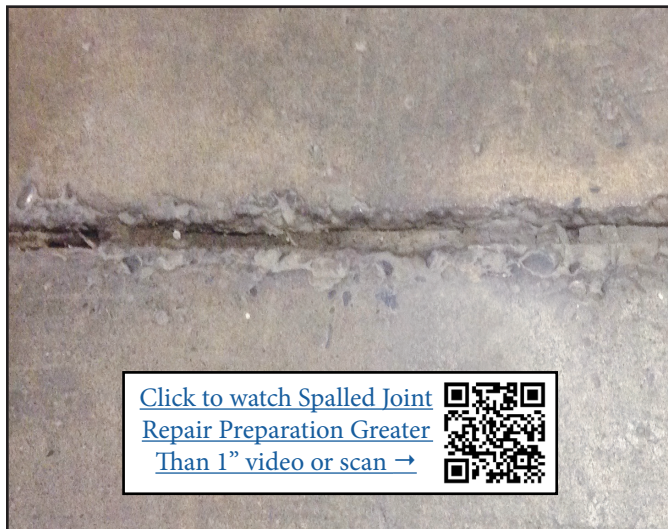

[Click to watch Spalled Joint Repair Preparation Greater Than 1" video or scan →](#)



REPAIR MATERIAL OPTIONS

Structural Epoxy Mortar

Armor-Hard (I)

Armor-Hard Extreme (I)

Armor-Hard Primer (I)

Sand Modified Semi

Rigid Epoxy

MM-80 KRP (I)

MM-80/MM-80P (I)

Freezer/Cooler

Spal-Pro 2000 or RSF (I)

TOOLS & EQUIPMENT NEEDED

Preferred:

Stand up walk behind dry cut saw with dustless shroud, Diamond blades, Vacuum system, Razor scraper/heat (**MM-80/MM-80P**), Pneumatic/electric chipper, Diamond cup wheel or similar

Minimal:


Right angle grinder with dustless shroud, Nyalox wheel, Shop vacuum, Razor scraper/heat (**MM-80/MM-80P**), hammer/chisel, Diamond cup wheel or similar

OPTION 1

Structural Epoxy Mortar


OPTION 2

MM-80 KRP, Sand Modified MM-80/MM-80P

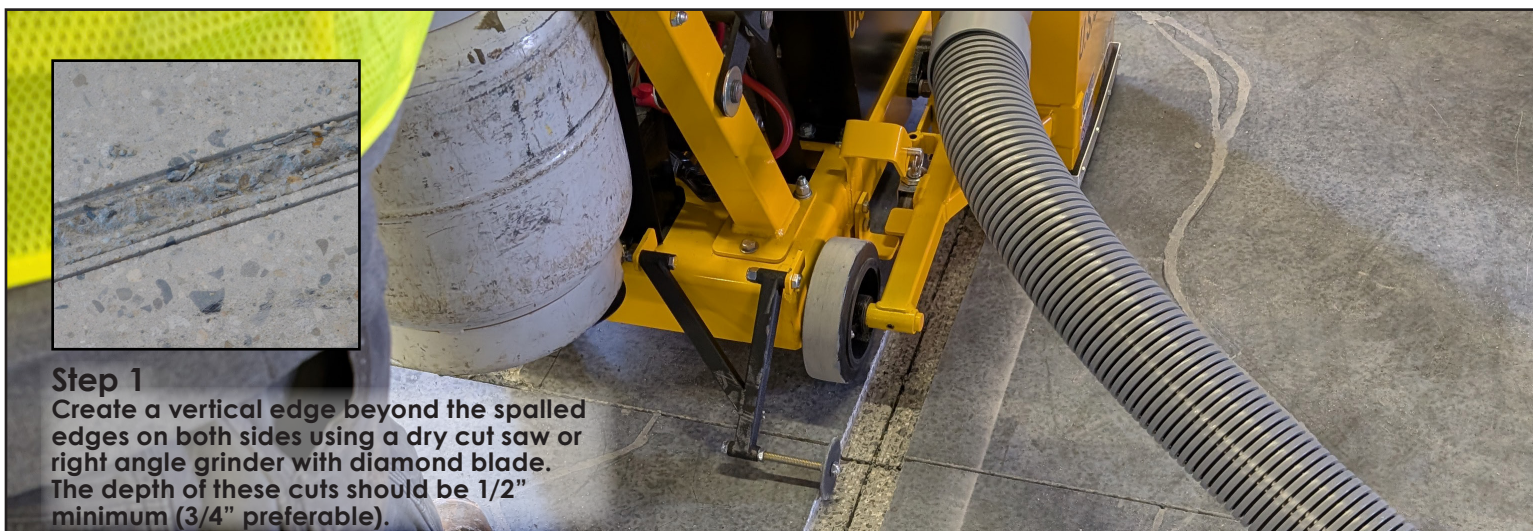

Step 1

Create a vertical edge beyond the spalled edges on both sides using a dry cut saw or right angle grinder with diamond blade. The depth of these cuts should be 1/2" minimum (3/4" preferable).

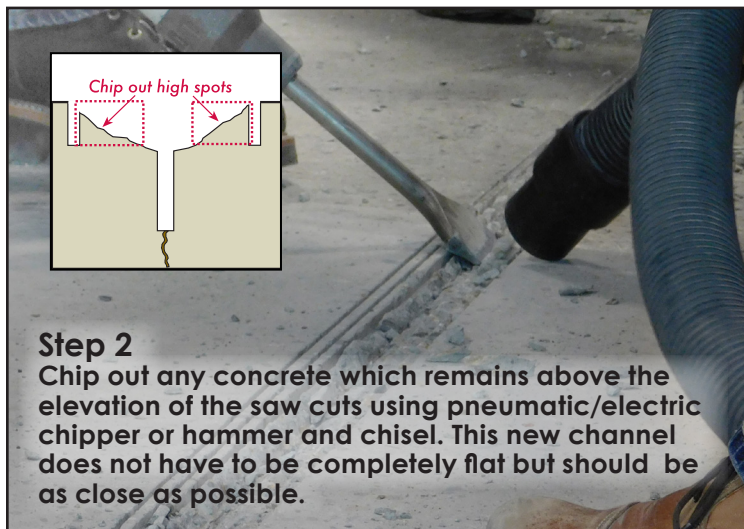

Step 2

Chip out any concrete which remains above the elevation of the saw cuts using pneumatic/electric chipper or hammer and chisel. This new channel does not have to be completely flat but should be as close as possible.



Step 3

Vacuum new joint channel clean. Backfill original joint opening with silica sand up to the base of the newly formed channel (Skip silica sand step if doing Option 2).

[Click to watch Armor-Hard Application in Joint Spalling Greater Than 1" video or scan →](#)



(I) = Industrial

(D) = Decorative

JOINT SPALLING, MAJOR

Greater than 1" (Continued)





Difficulty Of Repair



OPTION 1 Structural Epoxy Mortar

Step 4


Trowel Armor-Hard/Armor-Hard Extreme mortar smooth and only slightly higher than edges of the slab panels. Pending how dry of mix is used, priming repair area first with Armor-Hard Primer may be required.



Step 5


Allow mortar to cure. Grind off overfill until repair surface and edges are flush with both slab panels.

[Click to watch Edge Pro-90 Joint Filling in Armor-Hard Repair video or scan →](#)



Step 6

Using joint cleaning saw and diamond blade, create a new joint through structural repair mortar. Ensure depth of cut exceeds depth of mortar. Depth of cut should equal depth of original joint (or 2" minimum).



Step 7

Overfill newly formed joint with semi-rigid epoxy or polyurea joint filler. Allow to cure. Razor off excess filler flush with repair mortar.

(I) = Industrial (D) = Decorative

JOINT SPALLING, MAJOR

Greater than 1" (Continued)



Difficulty Of Repair




OPTION 2 MM-80 KRP, Sand Modified MM-80/MM-80P

(Follow Steps 1-3 for joint preparation)

Step 4

Pour sand modified MM-80/MM-80P into prepared channel slightly higher than panel edges. Most common ratio is 1 part mixed MM-80/MM-80P to 1 part silica, by volume. *MM-80 KRP is a premeasured kit including the silica sand.



Step 5

Allow semi-rigid mortar to cure.



Grind Overfill Flush

MM-80 KRP
Sand Modified
MM-80/MM-80P

Step 6

After cure grind flush with floor surface. Grinding pad may be a diamond cup wheel, or similar silicon carbide disc.

Step 5

Allow semi-rigid mortar to cure.

Due to its semi-rigid properties, no re-creation of joint is required. Re-seal/densify slab if necessary.

[Click to watch Sand Modified MM80 Application For Metal Keyway or scan→](#)



Re-sealed/Densified

(I) = Industrial

(D) = Decorative